



Video Solutions for Security Professionals

PRO-VS 2023

Effective August 2023



LTS reserves the right to modify, add or remove sale items. Prices & product specifications may change without prior notice. LTS is not responsible for typographical errors. Images may be used for illustration purpose only and do not represent actual products. Tax not included. All prices effective on August 2023. © 2023 LTS.



Download LTS Pro-VS App on



Apple Store



Google Play

Pro-VS



VMS Integration Partners **exacqVision** **avigilon**  **milestone** **ONVIF**

NVR

SKU	VSN8104-P4	VSN8208-P8	VSN7216-P16	VSN8216-P16
			 *Not Compatible with MD 2.0	
Featuring	  	  	 	  
Video Input	4CH IP @ 80Mbps	8CH IP @ 320Mbps	16CH IP @ 160Mbps	16CH IP @ 320Mbps
Video Output	HDMI up to 4K (3840 x 2160) / VGA up to 1080P	HDMI up to 4K (3840 x 2160), VGA up to 1080P	HDMI up to 4K (3840 x 2160) / VGA up to 1080P	HDMI up to 4K (3840 x 2160), VGA up to 1080P
Max. Recording Resolution	Up to 8MP (3840 x 2160)	Up to 12MP (4247 x 2826)	Up to 8MP (3840 x 2160)	Up to 12MP (4247 x 2826)
Decoding Format	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264
Decoding Capability	4CH @ 8MP / 8CH @ 4MP / 16CH @ 1080P	1CH @ 12MP / 2CH @ 8MP / 5CH @ 4MP / 8CH @ 1080P	2CH @ 8MP / 4CH @ 4MP / 8CH @ 1080P	1CH @ 12MP / 2CH @ 8MP / 5CH @ 4MP / 10CH @ 1080P
Max. Playback Resolution	Up to 8MP (3840 x 2160)	Up to 12MP (4247 x 2826)	Up to 8MP (3840 x 2160)	Up to 12MP (4247 x 2826)
Audio In/Out	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	-	8CH/2CH	4CH/1CH	8CH/2CH
Built-in PoE	4CH	8CH	16CH	16CH
Network	10/100M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 1 RJ45
Storage	Supports 1 SATA up to 8TB each	Supports 2 SATA up to 10TB each	Supports 2 SATA up to 10TB each	Supports 2 SATA up to 10TB each
Backup	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0
Dimensions	10.2"(W) x 8.7"(D) x 1.8"(H)	15.0"(W) x 12.4"(D) x 2.1"(H)	14.9"(W) x 12.4"(D) x 2.1"(H)	15.0"(W) x 12.4"(D) x 2.1"(H)
Recorder Case	Mini 1U	1U	1U	1U
Compatible Accessories	-	Rack Mount (VSRM72) Sold Separately	Rack Mount (VSRM72) Sold Separately	Rack Mount (VSRM72) Sold Separately

NVR

SKU	VSN7432-P16	VSN8432	VSN8432-P16	VSN8864-R
	 *Not Compatible with MD 2.0			
Featuring	 	   	   	  
Video Input	32CH IP @ 160Mbps	32CH IP @ 320Mbps	32CH IP @ 320Mbps	64CH IP @ 384Mbps
Video Output	HDMI up to 4K (3840 x 2160) / VGA up to 1080P	HDMI up to 4K (3840 x 2160), VGA up to 1080P	HDMI up to 4K (3840 x 2160), VGA up to 1080P	HDMI1 up to 4K (3840 x 2160), HDMI2 up to 4K, VGA up to 1080P
Max. Recording Resolution	Up to 8MP (3840 x 2160)	Up to 12MP (4247 x 2826)	Up to 12MP (4247 x 2826)	Up to 12MP (4247 x 2826)
Decoding Format	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264
Decoding Capability	2CH @ 8MP / 4CH @ 4MP / 8CH @ 1080P	1CH @ 12MP / 2CH @ 8MP / 5CH @ 4MP / 10CH @ 1080P	1CH @ 12MP / 2CH @ 8MP / 5CH @ 4MP / 10CH @ 1080P	2CH @ 12MP / 4CH @ 8MP / 8CH @ 4MP / 16CH @ 1080P
Max. Playback Resolution	Up to 8MP (3840 x 2160)	Up to 12MP (4247 x 2826)	Up to 12MP (4247 x 2826)	Up to 12MP (4247 x 2826)
Audio In/Out	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA	1CH/1CH, RCA
Alarm In/Out	16CH/4CH	16CH/4CH	16CH/4CH	16CH/4CH
Built-in PoE	16CH	-	16CH	-
Network	10/100/1000M, 1 RJ45	10/100/1000M, 2 RJ45	10/100/1000M, 1 RJ45	10/100/1000M, 2 RJ45
Storage	Supports 4 SATA up to 14TB each	Supports 4 SATA up to 6TB each; RAID 1, 5	Supports 4 SATA up to 10TB each; RAID 1, 5	Supports 8 SATA up to 10TB each; RAID 0, 1, 5, 6, 10
Backup	1 USB 2.0, 1 USB 3.0	2 USB 2.0, 1 USB 3.0	1 USB 2.0, 1 USB 3.0	2 USB 2.0, 1 USB 3.0
Dimensions	15.7"(W) x 14.2"(D) x 2.9"(H)	17.3"(W) x 13.5"(D) x 1.9"(H)	15.7"(W) x 14.3"(D) x 2.9"(H)	17.4"(W) x 16.8"(D) x 3.5"(H)
Recorder Case	1.5U	1.5U	1.5U	2U
Compatible Accessories	Rack Mount Included	Rack Mount Included	Rack Mount Included	Rack Mount Included

VMS			
SKU	VSVMS-500	VSVMS-2000	VSVMS-10K
			
Featuring	H.265+ 4K	H.265+	H.265
Video Input	250 Devices, 500 CH @ 512Mbps	1000 Devices, 2000 CH @ 512Mbps	2000 Devices, 10,000 CH @ 1024Mbps per server; 30,000 CH with Hierarchical Structure
Video Output	HDMI up to 4K / VGA up to 1080P	No GUI	No GUI
Max. Recording Resolution	Up to 12MP (4247 x 2826)	Up to 12MP (4247 x 2826)	Up to 12MP (4247 x 2826)
Decoding Format	H.265 / H.264	H.265+ / H.265 / H.264	H.265 / H.264
User Management	50 Online Users	300 Online Users	1000 Online Users
Power Output	12V DC	12V DC	-
Alarm In/Out	24CH/8CH	24CH/8CH	-
Network	10M/100M/1000M, 4 RJ45	10M/100M/1000M, 4 RJ45; 1000M 2 SFP	10/100/1000M, 3 RJ45
Storage	Pro-VS IP SAN	Supports 16 SATA up to 14TB each; RAID 0 / 1 / 5 / 6 / 10 / 50 / 60	Pro-VS IP SAN
Backup	4 USB 3.0	4 USB 3.0	4 USB 3.0
Dimensions	17.3"(W) x 13.6"(D) x 1.9"(H)	18.8"(W) x 19"(D) x 5.1"(H)	19"(W) x 21.7"(D) x 3.4"(H)
Accessory	Rack Mount Included	Rack Mount Included	-

PRO-VS VMS

16HDD | 500CH, 2,000CH, 10,000CH Video Input Options



Up to **10,000 channels**
in a single server
...
Up to **30,000 channels**
in a hierarchical structure

Fixed Lens Turret Camera

SKU	VSIP3442W-28MA	VSIP3442W-28MDA VSIP3442WB-28MDA VSIP3442W-MDA	VSIP3182W-28MDA VSIP3182WB-28MDA VSIP3182W-MDA	VSIP3C52W-28MA	VSIP3C82W-28MDA
					
Featuring	   	    	     	     	      
Resolution	4MP, 2688 x 1520 @ 30fps	4MP, 2688 x 1520 @ 25fps	8MP, 3840 x 2160 @ 20fps	5MP, 2880 x 1620 @ 30fps	8MP, 3840 x 2160 @ 30fps
Fixed Lens	2.8mm	2.8mm / 4mm	2.8mm / 4mm	2.8mm	2.8mm
Lux	0.01 Lux @ F2.0	0.003 Lux @ F1.6	0.005 Lux @ F1.6	0.001 Lux @ F1.0 Ultra Low Lux	0.001 Lux @ F1.0 Ultra Low Lux
Compression	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264 / MJPEG
IR	Smart IR LED up to 98ft	Smart IR LED up to 98ft	Smart IR LED up to 98ft	Smart LED up to 98ft	Smart LED up to 98ft
Feature	True WDR 120dB, HLC, Defog	MD 2.0, True WDR 120dB, HLC, Defog	MD 2.0, True WDR 120dB, HLC, Defog	MD 2.0, True WDR 120dB, HLC, Defog	MD 2.0, True WDR 120dB, HLC, Defog
Audio In/Out	Built-in Mic	Built-in Mic	Built-in Mic	Built-in Mic	Built-in Mic, 1CH/1CH
Alarm In/Out	-	-	-	-	1CH/1CH
Storage	MicroSD up to 256GB, Auto Network Replenishment	MicroSD up to 256GB	MicroSD up to 256GB	MicroSD up to 256GB, Auto Network Replenishment	MicroSD up to 256GB, Auto Network Replenishment
Axis	3 Axis	3 Axis	3 Axis	3 Axis	3 Axis
Rating	IP67, 2KV Surge Protection	IP67	IP67	IP67, 2KV Surge Protection	IP67, IK10 Vandal Proof
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Compatible Accessories	Compatible with Cameras Above				Compatible with VSIP3C82W-28MDA
	 VSJB742 Junction Box	 VSWM342 Wall Mount	 VSPD342 Pendant Mount	 VSPM342 Pole Mount	 VSJB763 Junction Box
					 VSWM763 Wall Mount

Fixed Lens Dome Camera				Fixed Bullet Camera		
SKU	VSIP7442W-28S	VSIP7442W-28MD VSIP7442W-MD	VSIP7182W-28MDA VSIP7182W-MDA	VSIP8442W-28MA	VSIP8342W-28MDA VSIP8342W-MDA	VSIP8382W-28MDA VSIP8382W-MDA
						
Featuring	    	    	     	    	    	     
Resolution	4MP, 2592 × 1520 @ 30fps	4MP, 2688 × 1520 @ 25fps	8MP, 3840 × 2160 @ 20fps	4MP, 2592 × 1520 @ 30fps	4MP, 2688 × 1520 @ 25fps	8MP, 3840 × 2160 @ 20fps
Fixed Lens	2.8mm	2.8mm / 4mm	2.8mm / 4mm	2.8mm	2.8mm / 4mm	2.8mm / 4mm
Lux	0.01 Lux @ F2.0	0.003 Lux @ F1.6	0.005 Lux @ F1.6	0.01 Lux @ F2.0	0.003 Lux @ F1.6	0.005 Lux @ F1.6
Compression	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG
IR	Smart IR LED up to 98ft	Smart LED up to 98ft	Smart LED up to 98ft	Smart IR LED up to 98ft	Smart IR LED up to 164ft	Smart IR LED up to 164ft
Feature	True WDR 120dB, HLC, Defog	MD 2.0, True WDR 120dB, HLC, Defog	MD 2.0, True WDR 120dB, HLC, Defog	True WDR 120dB, HLC, Defog	MD 2.0, True WDR 120dB, HLC, Defog	MD 2.0, True WDR 120dB, HLC, Defog
Audio In/Out	1CH/1CH	-	Built-in Mic	Built-in Mic	Built-in Mic	Built-in Mic
Storage	MicroSD up to 256GB, Auto Network Replenishment	MicroSD Slot up to 256GB	MicroSD Slot up to 256GB	MicroSD up to 256GB, Auto Network Replenishment	MicroSD Slot up to 256GB	MicroSD Slot up to 256GB
Axis	3 Axis	3 Axis	3 Axis	3 Axis	3 Axis	3 Axis
Rating	IP67, IK10 Vandal Proof, 2KV Surge Protection	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof	IP67, 2KV Surge Protection	IP67	IP67
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Compatible Accessories	Compatible with Cameras Above			Compatible with VSIP8442W	Compatible with Bullet Cameras VSIP8342W / VSIP8382W	
	 VSJB742 Junction Box	 VSWM342 Wall Mount	 VSPD342 Pendant Mount	 VSPM342 Pole Mount	 VSJB842 Junction Box	 VSJB973 Junction Box
					 VSPM963 Pole Mount	

Vari-focal Lens Camera					
SKU	VSIP3643W-MDAZ	VSIP7643W-SZ	VSIP7643W-MDAZ	VSIP9643W-SZ	VSIP9743W-MDAZ
					
	Junction Box Included	Junction Box Included	Junction Box Included	Junction Box Included	Junction Box Included
Featuring	     	    	     	   	     
Resolution	4MP, 2688 x 1520 @ 25fps	4MP, 2592 x 1520 @ 30fps	4MP, 2688 x 1520 @ 25fps	4MP, 2592 x 1520 @ 30fps	4MP, 2688 x 1520 @ 25fps
Vari-focal Lens	2.8 - 12mm, Auto Focus Motorized Zoom Lens	2.8 - 12mm, Auto Focus Motorized Zoom Lens	2.8 - 12mm, Auto Focus Motorized Zoom Lens	2.8 - 12mm, Auto Focus Motorized Zoom Lens	2.8 - 12mm, Auto Focus Motorized Zoom Lens
Lux	0.003 Lux @ F1.6	0.003 Lux @ F1.6	0.003 Lux @ F1.6	0.003 Lux @ F1.6	0.003 Lux @ F1.6
Compression	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264	H.265+ / H.265 / H.264 / MJPEG
IR	Smart LED up to 131ft	Smart IR LED up to 98ft	Smart LED up to 131ft	Smart IR LED up to 164ft	Smart IR LED up to 164ft
Features	MD 2.0, True WDR 120dB, HLC, Defog	True WDR 120dB, HLC, Digital Defog	MD 2.0, True WDR 120dB, HLC, Defog	True WDR 120dB, HLC, Digital Defog	MD 2.0, True WDR 120dB, HLC, Defog
Audio In/Out	Built-in Mic	1CH/1CH	Built-in Mic	1CH/1CH	Built-in Mic
Alarm In/Out	-	1CH/1CH	-	1CH/1CH	-
Storage	MicroSD Slot up to 256GB	MicroSD up to 256GB, Auto Network Replenishment	MicroSD Slot up to 256GB	MicroSD up to 256GB, Auto Network Replenishment	MicroSD Slot up to 256GB
Axis	3 Axis	3 Axis	3 Axis	3 Axis	3 Axis
Rating	IP67, IK10 Vandal Proof	IP67, IK10 Vandal Proof 6KV Surge Protection	IP67, IK10 Vandal Proof	IP67, 6KV Surge Protection	IP67, IK10 Vandal Proof
Power	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE	DC 12V, PoE
Compatible Accessories	Compatible with VSIP3643W, VSIP7643W-SZ and VSIP7643W-MDAZ			Compatible with VSIP9643W and VSIP9743W	
	 VSWM763 Wall Mount	 VSPM342 Pole Mount for VSIP36/7643W-MDAZ	 VSPD342 Pendant Mount for VSIP36/7643W-MDAZ	 VSPM963 Pole Mount	

Fisheye Camera		
SKU	VSIP7552FW-SE	VSIP75122F-SE
		
		
Featuring	     	     
Resolution	5MP, 2592 x 1944 @ 30fps	12MP, 4000 x 3000 @ 20fps
Lens and Zoom	1.4mm	1.8mm
Lux	0.01 Lux @ F2.0	0.03 Lux @ F2.0
Compression	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG
IR Technology	Smart LED up to 33ft	Smart LED up to 49ft
Features	True WDR 120dB, Defog	True WDR 120dB, Defog, Front End De-warping
Audio In/Out	Built-in Mic, 1CH/1CH	Built-in Mic, 1CH/1CH
Alarm In/Out	1CH/1CH	2CH/1CH
Storage	MicroSD up to 256GB, Auto Network Replenishment	MicroSD up to 256GB, Auto Network Replenishment
Rating	IP66, IK10 Vandal Proof	IP66, IK10 Vandal Proof
Power	DC 12V, PoE	DC 12V, PoE
Dimensions	4.9" x 1.7" (Φ)	5.9" x 2.2" (Φ)
Accessories	Junction Box VSJB763 Sold Separately	Junction Box VSJB122 Sold Separately
Compatible Accessories	 VSJB763 Fixed Dome Junction Box	 VSJB122 Junction Box

PTZ Camera

SKU	VSPTZIP3122WSL-X4IR	VSPTZIP4C44WSL-X25IR	VSPTZIP424X25WIR	VSPTZIP674X33WIR		
	2^{yr} WARRANTY 	2^{yr} WARRANTY 	2^{yr} WARRANTY 	2^{yr} WARRANTY 		
Featuring	SD TRUE WDR H.265+   	COLOR 24/7 SD TRUE WDR   	SD TRUE WDR   	SD TRUE WDR  		
Resolution	2MP, 25fps Wide Angle; 2MP 25fps PTZ	4MP, 2688 × 1520 @ 30fps	4MP, 2688 × 1520 @ 30fps	4MP, 2688 × 1520 @ 30fps		
Lens and Zoom	2.8mm; 2.8 - 12mm, 4x Optical Zoom, Auto Focus	4.8 - 120mm, 25x Optical Zoom, Auto Focus	4.8 - 120mm, 25x Optical Zoom, Auto Focus	4.5 - 148.5mm, 33x Optical Zoom, Auto Focus		
Lux	0.002 Lux @ F1.6	0.0005 Lux @ F1.0 Ultra Low Lux	0.003 Lux @ F1.5	0.003 Lux @ F1.5		
Compression	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG	H.265+ / H.265 / H.264 / MJPEG		
IR Technology	Wide IR LED up to 33ft; PTZ IR LED up to 160ft and Warm Light up to 33ft	IR LED up to 330ft	IR LED up to 330ft	IR LED up to 500ft		
Tracking	Linked Tracking	Smart Tracking	Smart Tracking	Smart Tracking		
Storage	MicroSD up to 256GB, Auto Network Replenishment	MicroSD up to 256GB, Auto Network Replenishment	MicroSD up to 256GB, Auto Network Replenishment	MicroSD up to 256GB, Auto Network Replenishment		
Movement Range	18°±5°; 0° - 345°, -10° - 100°	Pan 0° - 360°, Tilt -15° - 90°	-15° - 90° (Auto-flip)	-15° - 90° (Auto-flip)		
Image Enhancement	120dB WDR on Wide Angle; DWDR on PTZ	120dB WDR	120dB WDR	120dB WDR		
Audio In/Out, Alarm In/Out	Built-in Mic & Speaker	Audio 1CH/1CH, Alarm 2CH/1CH	Audio 1CH/1CH, Alarm 2CH/1CH	Audio 1CH/1CH, Alarm 1CH/1CH		
Outdoor Rating	IP66	IP66	IP67, IK10 Vandal Proof	IP66, Metal Housing		
Power	DC 12V 2A, PoE+ (802.3at), Max 16W	DC 12V±25%, PoE+ (802.3at), Max 24W	DC 12V 3A, PoE+ (802.3at), Max 21W	AC 24V±25%, DC 24V±25%, PoE+ (802.3at), Max 25W		
Dimensions	3.5" (Φ)	4" (Φ)	4" (Φ)	6" (Φ)		
Accessories	Wall Mount / Ceiling Mount Bracket Included, PoE+ (30W) Not Included	Wall Mount Bracket, PoE+ (30W) Not Included	Wall Mount Bracket, PoE+ (30W) Not Included	Wall Mount Bracket, PoE+ (30W) Not Included		
Compatible Accessories	Compatible with VSPTZIP4C44WSL-X25IR, VSPTZIP424X25WIR and VSPTZIP674X33WIR					
	 VSWM424 Wall Mount	 VSWM674 Wall Mount	 VSCM643 Corner Mount	 VSPD643 Pendant Mount	 VSPM643 Pole Mount	 VSPP643 Parapet Mount



Video Solutions for Security Professionals

Arizona - Phoenix

2850 S. 36th St., Suite A-7
Phoenix, AZ 85034
Toll Free: 877-284-2890
Tel: 602-903-2220
Email: Support.AZ@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (MST): MON - FRI
En LTS Arizona hablamos español

Florida - Miami

8400 NW 25th St., Suite 110
Miami, FL 33122
Tel: 786-693-1813
Email: Support.Florida@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
En LTS Florida hablamos español

Maryland - Beltsville

7001 Muirkirk Meadows Dr., Suite A
Beltsville, MD 20705
Tel: 240-493-8988
Email: Support.Maryland@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
En LTS Maryland hablamos español

Texas - Dallas

1100 Valwood Pkwy., Suite 112
Carrollton, TX 75006
Tel: 469-289-5780
Email: Support.Dallas@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (CST): MON - FRI
En LTS Dallas hablamos español

Texas - Houston

8634 Westpark Dr.
Houston, TX 77063
Tel: 713-587-1800
Email: Support.Houston@LTSecurityinc.com
Sales Office: 8:30am - 6pm (CST): MON - FRI
En LTS Houston hablamos español

California - Los Angeles

17333 Freedom Way
City of Industry, CA 91748
Toll Free: 888-587-5871
Tel: 626-435-2838
Email: Contact.LosAngeles@ltsecurityinc.com
Sales Office: 8:30am - 6pm (PST): MON - FRI
En LTS California hablamos español

Georgia - Norcross

5933 Peachtree Industrial Blvd., Suite B
Norcross, GA 30092
Tel: 678-710-3788
Email: Support.GA@LTSecurityinc.com
Sales Office: 9am - 6pm (EST): MON - FRI

New Jersey - Mount Laurel

109 West Park Dr., Suite B & C
Mount Laurel, NJ 08054
Toll Free: 855-835-8889
Tel: 856-780-9888
Email: Support.NewJersey@LTSecurityinc.com
Sales Office: 8:30am - 6pm (EST): MON - FRI



Visit LTSecurityinc.com

California - San Francisco


38507 Cherry St., Suite G
Newark, CA 94560
Toll Free: 888-216-2812
Tel: 510-201-9868
Email: Support.SanFrancisco@LTSecurityinc.com
Sales Office: 9am - 6pm (PST): MON - FRI

Illinois - Chicago

1951 Landmeier Rd.
Elk Grove Village, IL 60007
Tel: 630-348-8088
Email: Support.Chicago@LTSecurityinc.com
Sales Office: 9am - 6pm (CST): MON - FRI
En LTS Illinois hablamos español

New York - Long Island

99 Seaview Blvd., Suite 1B
Port Washington, NY 11050
Toll Free: 888-517-3102
Tel: 646-558-3888
Email: Support.NewYork@LTSecurityinc.com
Sales Office: 8:30am - 5:30pm (EST): MON - FRI
After-hour Pickup Available

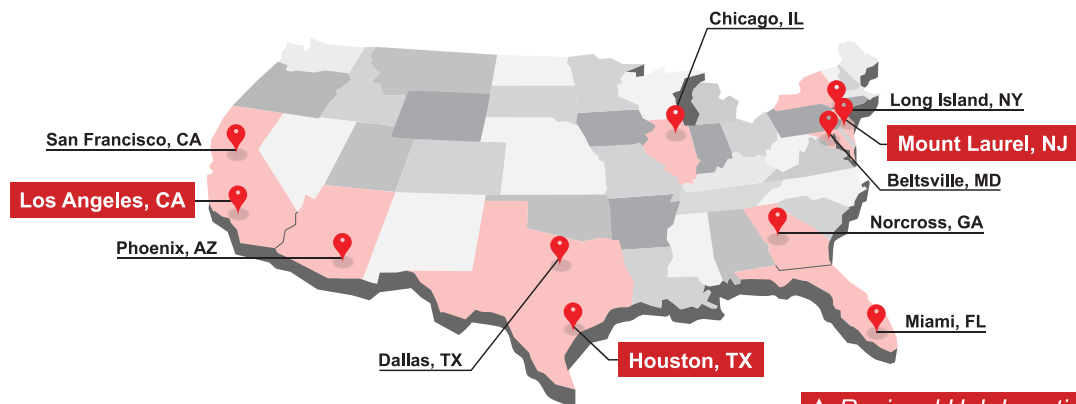

★ *Regional Hub Location*